

SPEC No.	CC274005A
ISSUE :	Jun. 10 2015

To : _____

PRELIMINARY

SPECIFICATIONS

Product Type 1/3-type Progressive Scan B/W CCD Area Sensor with 350k Pixels (1ch)

Model No R J 3 3 B 4 A A 0 D T

- ※ This specifications contains 20 pages including the cover and appendix.
If you have any objections, please contact us before issuing purchasing order.

CUSTOMERS ACCEPTANCE

DATE : _____

BY : _____

PRESENTED

BY : J. Nakai

J.NAKAI

Dept. General Manager

REVIEWED BY :

PREPARED BY :

T. Yoshida

T. Kenzaki



Development Dept. VI
Sensing Device Unit
Electronic Components And Devices Division
SHARP CORPORATION

- Handle this document carefully for it contains material protected by international copyright law. Any reproduction, full or in part, of this material is prohibited without the express written permission of the company.
- When using the products covered herein, please observe the conditions written herein and the precautions outlined in the following paragraphs. In no event shall the company be liable for any damages resulting from failure to strictly adhere to these conditions and precautions.
 - (1) Please do verify the validity of this part after assembling it in customer's products, when customer wants to make catalogue and instruction manual based on the specification sheet of this part.
 - (2) The products covered herein are designed and manufactured for the following application areas. When using the products covered herein for the equipment listed in Paragraph (3), even for the following application areas, be sure to observe the precautions given in Paragraph (3). Never use the products for the equipment listed in Paragraph (4).

Office electronics



 - Instrumentation and measuring equipment
 - Machine tools
 - Audiovisual equipment
 - Home appliance
 - Communication equipment other than for trunk lines
 - (3) Those contemplating using the products covered herein for the following equipment which demands high reliability, should first contact a sales representative of the company and then accept responsibility for incorporating into the design fail-safe operation, redundancy, and other appropriate measures for ensuring reliability and safety of the equipment and the overall system.
 - Control and safety devices for airplanes, trains, automobiles, and other transportation equipment
 - Mainframe computers
 - Traffic control systems
 - Gas leak detectors and automatic cutoff devices
 - Rescue and security equipment
 - Other safety devices and safety equipment, etc
 - (4) Do not use the products covered herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.
 - Aerospace equipment
 - Communications equipment for trunk lines
 - Control equipment for the nuclear power industry
 - Medical equipment related to life support, etc.
 - (5) Please direct all queries and comments regarding the interpretation of the above three Paragraphs to a sales representative of the company.
- Please direct all queries and regarding the products covered herein to a sales representative of the company.

CONTENTS


1	DESCRIPTION	2
1.1	Features	
1.2	Applications	
2	ARRANGEMENT OF PIXELS	3
3	PIN CONFIGURATION	4
4	ABSOLUTE MAXIMUM RATINGS	4
5	RECOMMENDED OPERATING CONDITIONS	5
6	CHARACTERISTICS	6
7	DRIVE TIMING CHART	7
8	EXAMPLE OF STANDARD OPERATING CIRCUIT	10
9	SPECIFICATION FOR BLEMISH	11
10	PRECAUTIONS	13
10.1	Package Breakage	
10.2	Electrostatic Damage	
10.3	Dust and Contamination	
10.4	Other	
11	PACKAGE OUTLINE AND PACKING SPECIFICATION	15

The circuit diagram and others included in this specifications are intended for use to explain typical application examples. Therefore, we take no responsibility for any problem as may occur due to the use of the included circuit and for any problem with industrial proprietary rights or other rights.

2 ARRANGEMENT OF PIXELS

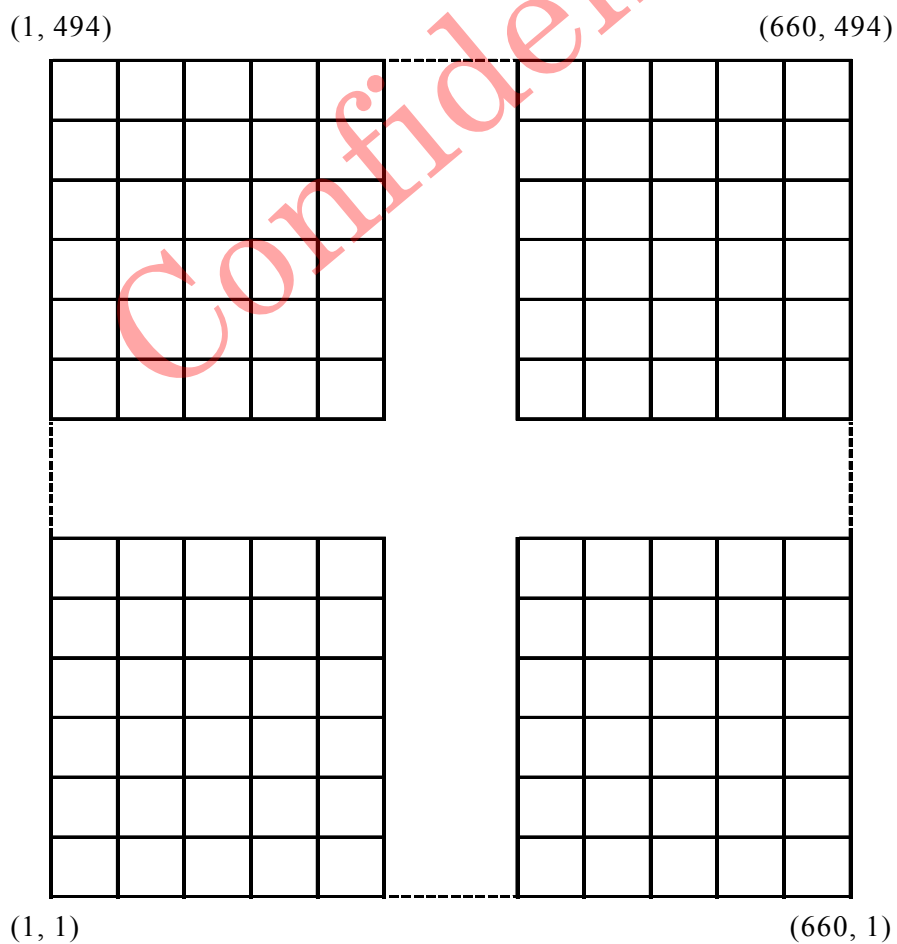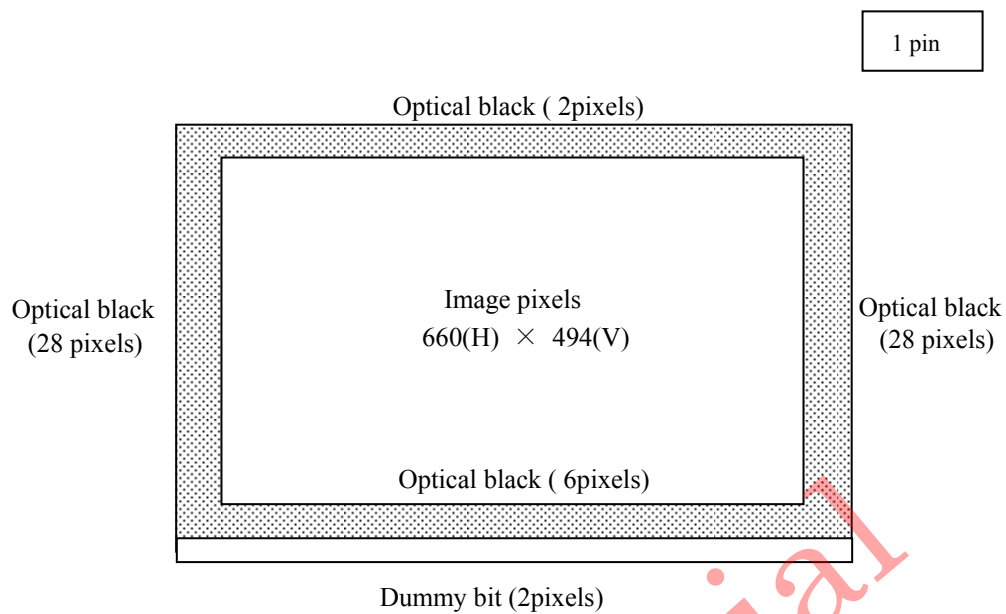

3 PIN CONFIGURATION(TOP VIEW)

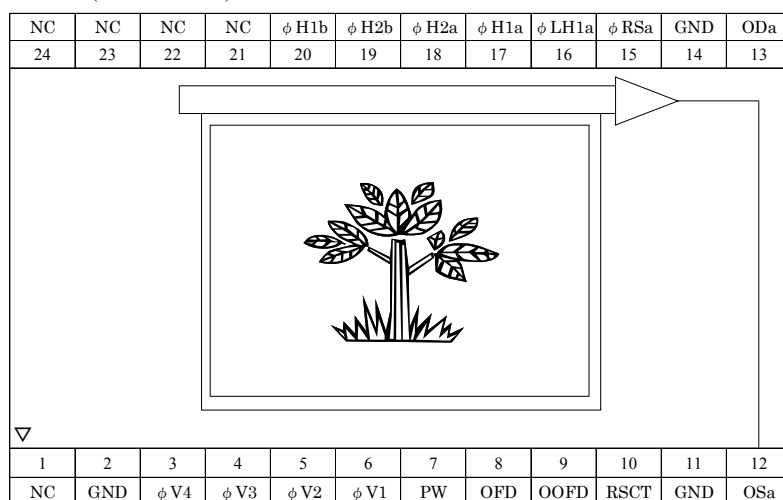

Symbol	Pin name
ODa	Output transistor drain
OSa	Output signals
ϕ RSa	Reset transistor clock
ϕ V1, ϕ V2, ϕ V3, ϕ V4	Vertical shift register clock
ϕ LH1a, ϕ H1a, ϕ H2a, ϕ H1b, ϕ H2b	Horizontal shift register clock
OFD	Overflow drain
OOFD	Output overflow drain
PW	P well
GND	Ground
RSCT	Reset control

4 ABSOLUTE MAXIMUM RATINGS

(T_A=25°C)

Parameter	Symbol	Ratings	Unit
Output transistor drain voltage	V _{OD}	0 to +15.4	V
Overflow drain voltage	V _{OFD}	0 to +32	V
Overflow drain output voltage	V _{OOFD}	Internal output (Note 1)	
Reset gate clock voltage	V _{ϕ RS}	Internal output (Note 2)	
Vertical shift register clock voltage	V _{ϕ V}	V _{PW} to +15.4	V
Horizontal shift register clock voltage	V _{ϕ H}	-0.3 to +5.1	V
Voltage difference between P _{well} and vertical clock	V _{PW} -V _{ϕ V}	-23.8 to +0	V
Voltage difference between vertical clocks	V _{ϕ V} -V _{ϕ V}	0 to +9.9 (Note 3)	V
Reset control voltage	V _{RSCT}	-0.3 to +7	V
Storage temperature	T _{STG}	-40 to +90	°C
Ambient operating temperature	T _{OPR}	-30 to +85	°C

(Note 1) Use the circuit parameter indicated in “8. EXAMPLE OF STANDARD OPERATING CIRCUIT” and do not connect to DC voltage directly. When OOFD is connected to GND, connect V_{OD} to GND.

(Note 2) Do not connect to DC voltage directly. When ϕ RS is connected to GND, connect V_{OD} to GND. Reset gate clock is applied below 5.1 Vp-p.

(Note 3) When clock width is below 10 μ s, and clock duty factor is below 0.1 %, voltage difference between adjoining vertical clocks are guaranteed up to 15.4 V.
Do not change all ϕ V during 0.5 μ s before rising edge of V _{ϕ VH} pulse and after falling edge of V _{ϕ VH} pulse.

Do not change directly into V _{ϕ VL}→V _{ϕ VH} or V _{ϕ VH}→V _{ϕ VL}.

5 RECOMMENDED OPERATING CONDITIONS

Parameter		Symbol	Min.	Typ.	Max.	Unit
Ambient operating temperature		T_{OPR}		25.0		°C
Output transistor drain voltage		V_{ODa}	13.1	13.5	13.9	V
Overflow drain clock	p-p level (Note 1)	$V_{\phi OFD}$	19.3	20.0	20.7	V
Ground		GND		0.0		V
P _{well} voltage (Note 2)		V_{PW}	-6.8		$V_{\phi VL}$	V
Vertical shift register clock	LOW level	$V_{\phi V1L}, V_{\phi V2L}, V_{\phi V3L}, V_{\phi V4L}$	-6.8	-6.5	-6.2	V
	INTERMEDIATE level	$V_{\phi V1I}, V_{\phi V2I}, V_{\phi V3I}, V_{\phi V4I}$		0.0		V
	HIGH level	$V_{\phi V1H}$	13.1	13.5	13.9	V
Horizontal shift register clock	LOW level	$V_{\phi LH1aL}, V_{\phi H1aL}, V_{\phi H2aL}, V_{\phi H1bL}, V_{\phi H2bL}$	-0.05	0.0	0.05	V
	HIGH level	$V_{\phi LH1aH}, V_{\phi H1aH}, V_{\phi H2aH}, V_{\phi H1bH}, V_{\phi H2bH}$	3.15	3.3	3.6	V
Reset gate clock	p-p level (Note 1)	$V_{\phi RSaH}$	3.15	3.3	5.5	V
Reset control voltage (Note 4)		V_{RSCT}	2.8		3.6	V
Vertical shift register clock frequency (Note 3)		$f_{\phi V1}, f_{\phi V2}, f_{\phi V3}, f_{\phi V4}$		60.7		kHz
Horizontal shift register clock frequency		$f_{LH1a}, f_{H1a}, f_{H2a}, f_{H1b}, f_{H2b}$		60.0		MHz
Reset gate clock frequency		$f_{\phi RSa}$		60.0		MHz

(Note 1) Use the circuit parameter indicated in “EXAMPLE OF STANDARD OPERATING CIRCUIT”, and do not connect to DC voltage directly.

(Note 2) V_{PW} is set below $V_{\phi VL}$ that is low level of vertical shift register clock, or is used with the same power supply that is connected to V_L of V driver IC.

(Note 3) At frame accumulation mode.

(Note 4) Do not use V_{RSCT} HIGH(2.8 to 3.6V) in case $V_{\phi RSH}$ is set as 3.15 to 4.5V.
Refer to the relationship of Reset gate clock voltage and Reset control voltage as following table.

Reset gate clock voltage	Reset control voltage	Saturation output voltage Min.
4.5 to 5.5 V	LOW(0V)	1000mV
	HIGH(2.8 to 3.6V)	1500mV
3.15 to 4.5V	LOW(0V)	1000mV
	HIGH(2.8 to 3.6V)	Caution :prohibition

※ To apply power, first connect GND and then turn on V_{OD} . After turning on V_{OD} , turn on V_{PW} first and then turn on other powers and pulses.

Do not connect the device to or disconnect it from the plug socket while power is being applied.

6 CHARACTERISTICS (Drive method : 1/30s frame accumulation)

T_A : +25°C, but +60°C for parameter No.4 and No.5.

Operating conditions : The typical values specified in "5 RECOMMENDED OPERATING CONDITIONS".

Color temperature of light source : 3200K, IR cut-off filter (CM-500,1 mm) is used.

No.	Parameter	Symbol	Note	Min.	Typ.	Max.	Unit
1	Standard output voltage	V_O	1		150		mV
2	Photo response non-uniformity	PRNU	2			10	%
3	Saturation output voltage	V_{SAT}	3	1000※			mV
4	Dark output voltage	V_{DARK}	4		0.5	3.0	mV
5	Dark signal non-uniformity	DSNU	5		0.5	2.0	mV
6	Sensitivity	R	6	3600	4500		mV
7	Smear ratio	SMR	7		-125	-110	dB
8	Image lag	AI	8			1.0	%
9	Blooming suppression ratio	ABL	9	1000			
10	Output transistor drain current	I_{OD}			6.0		mA

【 Notes 】

- 1 The average output voltage of under the uniform illumination. The standard exposure conditions are defined as when V_O is 150 mV.
- 2 The image area is divided into 10×10 segments under the standard exposure conditions. Each segment's voltage is the average output voltage of all pixels within the segment. PRNU is defined by $(V_{max} - V_{min}) / V_O$, where V_{max} and V_{min} are the maximum and minimum values of each segment's voltage respectively.
- 3 The image area is divided into 10×10 segments. Each segment's voltage is the average output voltages of all pixels within the segment. V_{SAT} is the minimum segment's voltage under 20 times exposure of the standard exposure conditions.
- 4 The average output voltage under non-exposure conditions.
- 5 The image area is divided into 10×10 segments under non-exposure conditions. DSNU is defined by $(V_{dmax} - V_{dmin})$, where V_{dmax} and V_{dmin} are the maximum and minimum values of each segment's voltage respectively.
- 6 The average output voltage when a 1000 lux light source with a 90 % reflector is imaged by a lens of F4, f50 mm.
- 7 The sensor is exposed only in the central area of V/10 square with a lens at F4, where V is the vertical image size. SMR is defined by the ratio of the output voltage detected during the vertical blanking period to the maximum output voltage in the V/10 square.
- 8 The sensor is exposed at the exposure level corresponding to the standard conditions. AI is defined by the ratio of the output voltage measured at the 1st field during the non-exposure period to the standard output voltage.
- 9 The sensor is exposed only in the central area of V/10 square, where V is the vertical image size. ABL is defined by the ratio of the exposure at the standard conditions to the exposure at a point where blooming is observed.


※ V_{SAT} depend on the applied voltage of V_{RSCT} and $V_{\phi RSH}$. Refer to the relationship of V_{RSCT} and $V_{\phi RSH}$ indicated in "5 RECOMMENDED OPERATING CONDITIONS" (Note4)

【 Comment 】


Within the recommended operating conditions of V_{OD} , V_{OFD} of the internal output satisfies with ABL and V_{SAT} .

7 DRIVE TIMING CHART


Vertical transfer timing [All-pixel readout mode] fck=60MHz 120fps

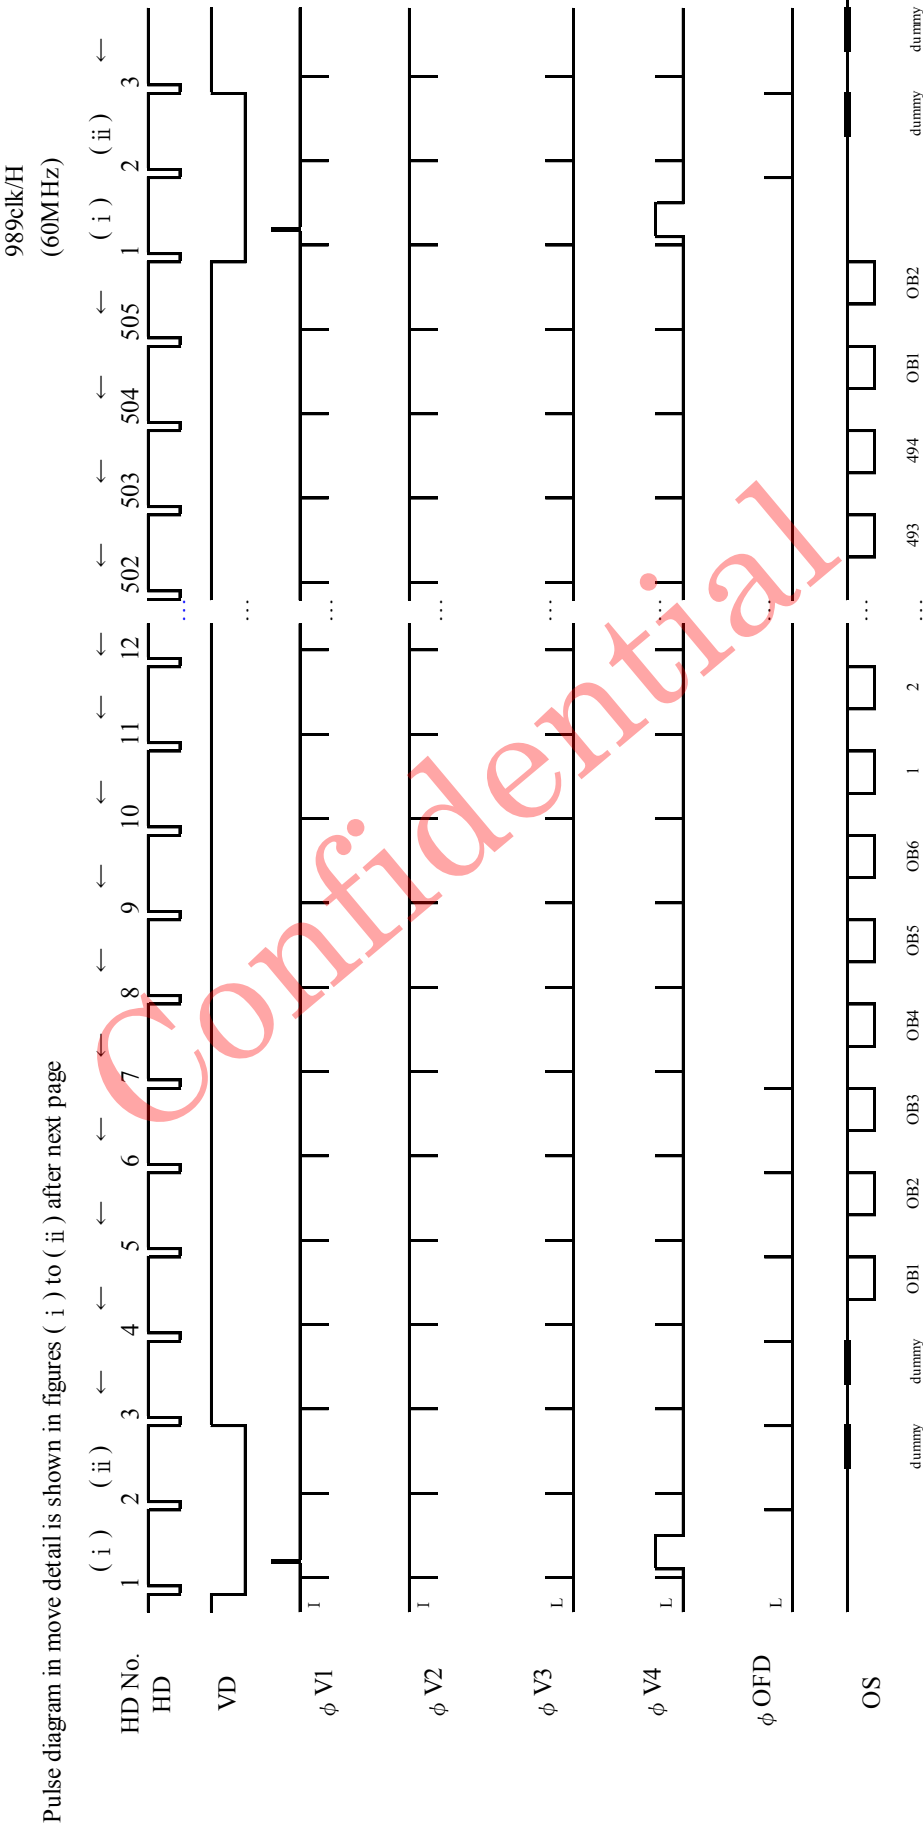

Horizontal transfer timing【 All-pixel readout mode 】 fck=60MHz 120fps (ii)

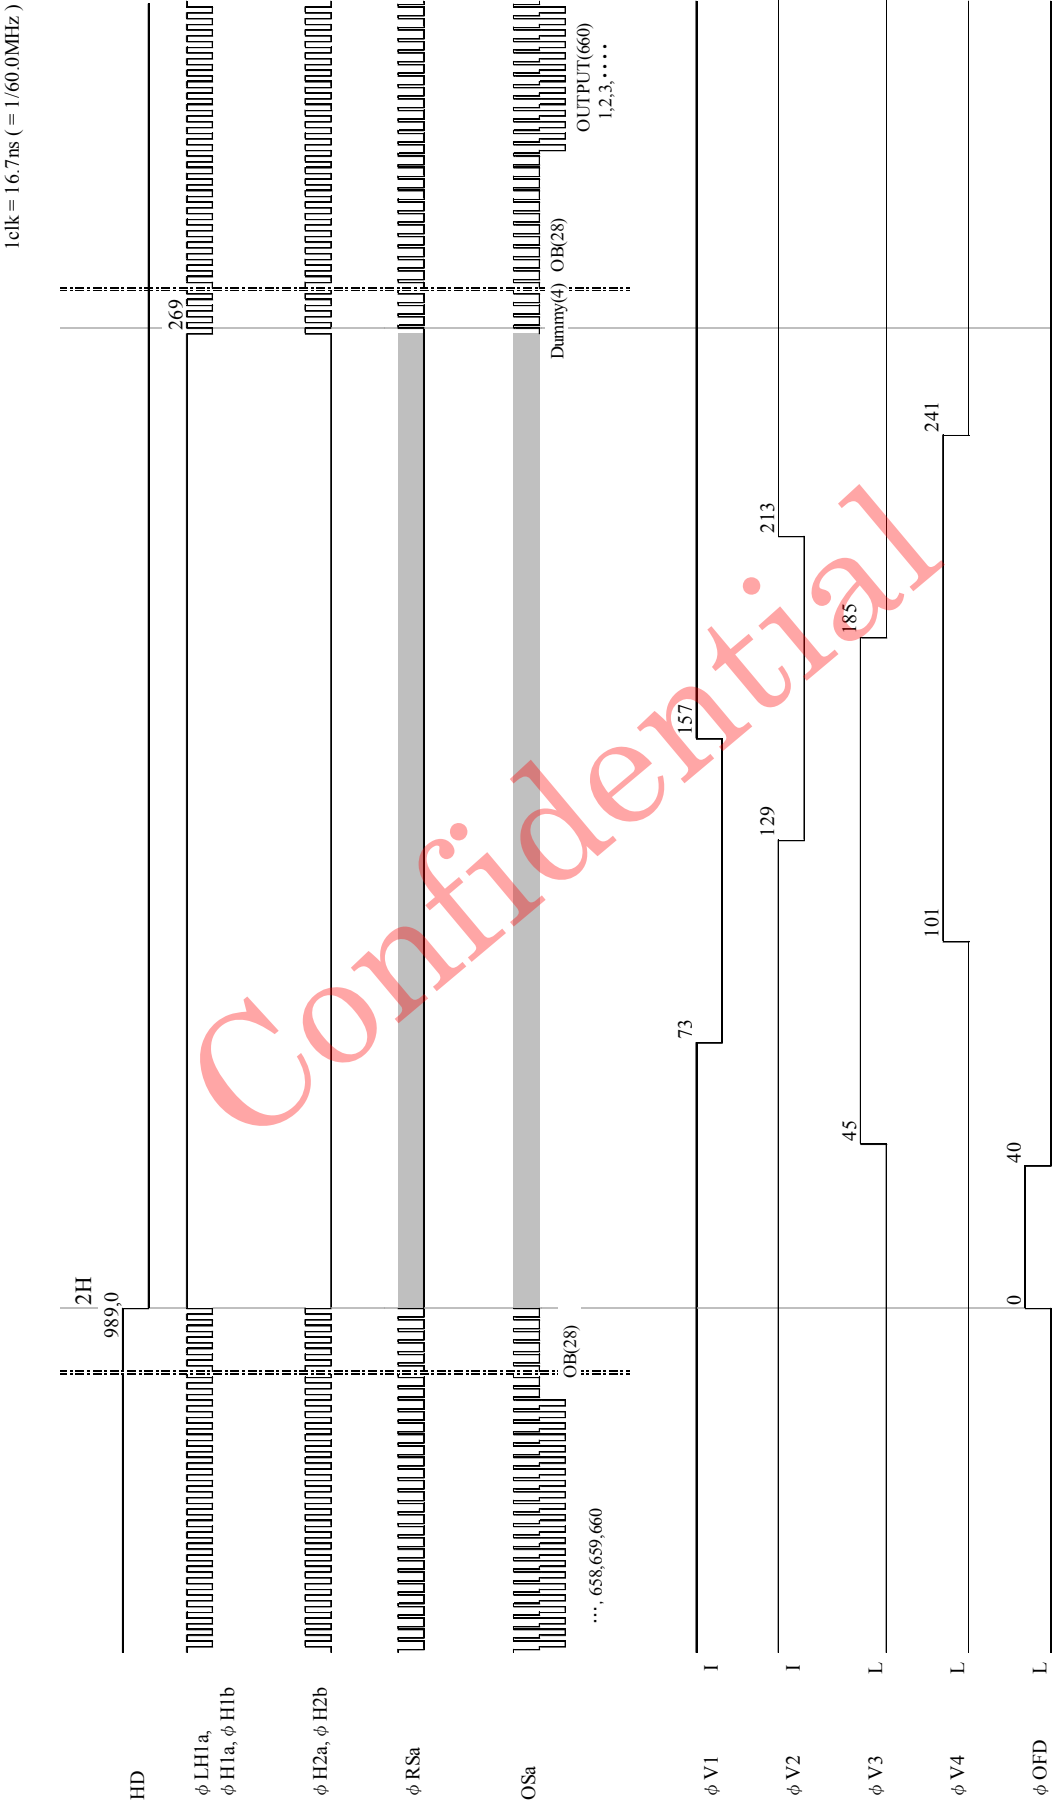

* Keep over the periods indicated in this timing chart when vertical transfer clock pulse is overlapping.

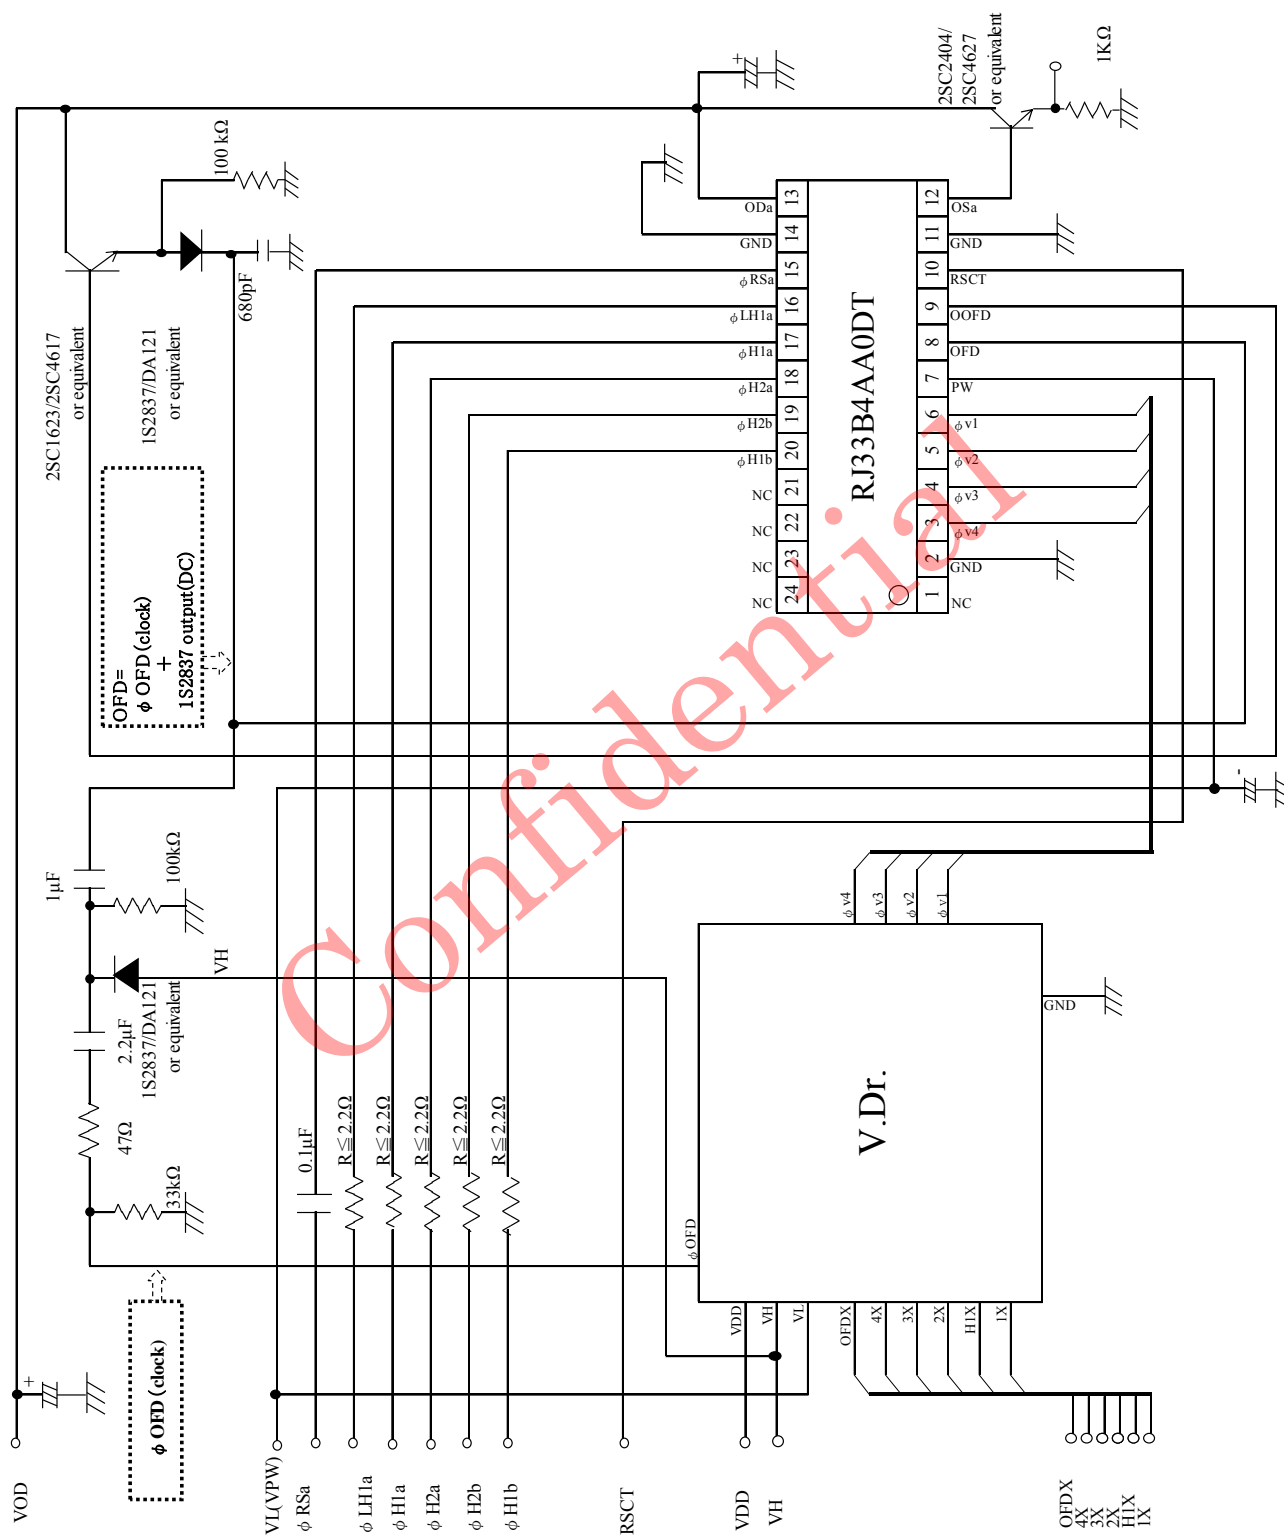

9 SPECIFICATION FOR BLEMISH (1/30 s frame accumulation)


1) Definition of blemish

	Level of blemish (mV)	Permitted number of blemish	Comment
White blemish (Exposed)	$100 \leq B$	0	<ul style="list-style-type: none"> • See fig.9-1(a), fig.9-2. • $V_{out} = V_{std}$
	$B < 100$	no count	
Black blemish (Exposed)	$120 \leq B$	0	
	$55 \leq B < 120$	2	
	$40 \leq B < 55$	2	
	$B < 40$	no count	
White blemish (Non-Exposed)	$100 < B$	0	<ul style="list-style-type: none"> • See fig.9-1(b), fig.9-2 • $N \leq 10$ • $M + N \leq 50$
	$20 < B \leq 100$	N	
	$2.5 < B \leq 20$	M	
	$B \leq 2.5$	no count	
White blemish (Shutter mode)	$5.0 \leq B$	0	<ul style="list-style-type: none"> • See fig.9-1(a), fig.9-2. • $V_{out} = V_{std}/10$ • The electronic shutter speed is set at 1/10000 s
	$B < 5.0$	no count	
Black blemish (Shutter mode)	$5.0 \leq B$	0	
	$B < 5.0$	no count	

- B : Blemish level defined in fig. 9-1.
- V_{out} : Average output voltage
- V_{std} : 150 mV (The average output voltage). The standard output voltage defined in the specification of the characteristics.

【MEASURING CONDITION】

- Ta : 60 °C
- Measuring block diagram

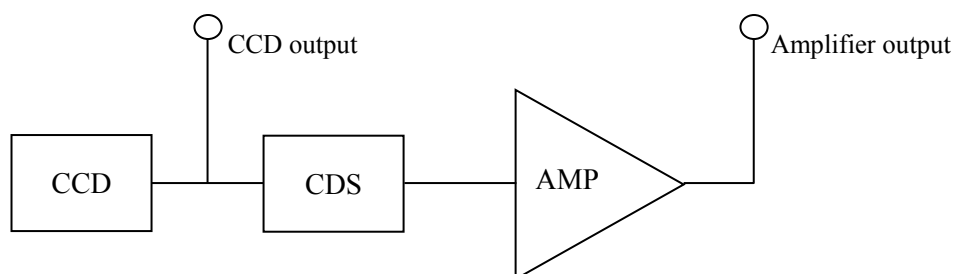

The output voltage is measured at the CCD output.

The gain of the amplifier is adjusted to the unity between the CCD output and the amplifier output.

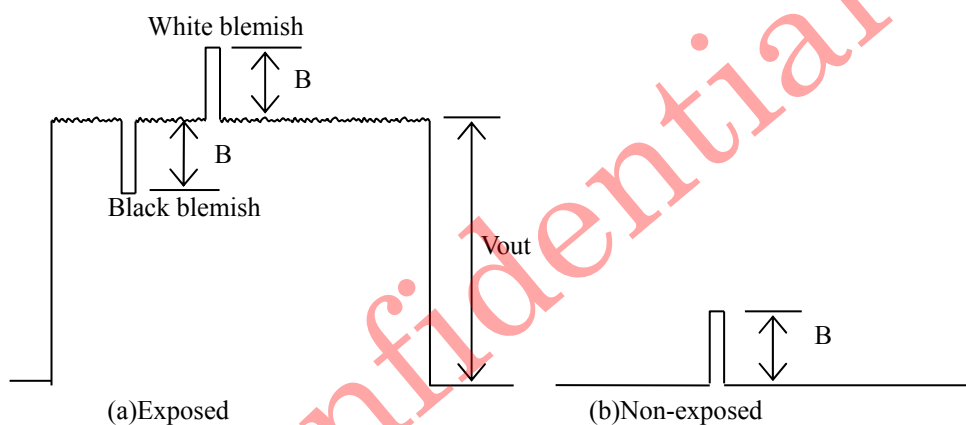


fig. 9-1 Definition of blemish level

(The wave form is the luminance signal measured at the Amplifier output)

【MEASURING AREA】

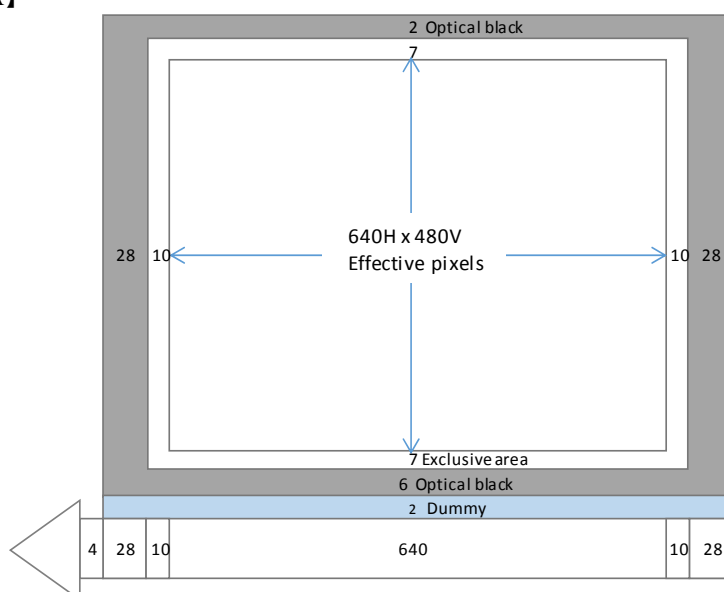


fig. 9-2 Definition of the measuring area

10 PRECAUTIONS

10.1 Package Breakage

In order to prevent the package from being broken, observe the following instructions:

- 1) The CCD is a precise optical component and the package material is plastic.
Therefore,
 - Take care not to drop the device when mounting, handling, or transporting.
 - Avoid giving a shock to the package. Especially when leads are fixed to the socket or the circuit board, small shock could break the package more easily than when the package isn't fixed.
- 2) When mounting the package on the housing, be sure that the package is not bent.
 - If a bent package is forced into place between a hard plate or the like, the package may be broken.
- 3) If any damage or breakage occurs on the surface of the glass cap, its characteristics could deteriorate.
Therefore,
 - Do not hit the glass cap.
 - Do not give a shock large enough to cause distortion.
 - Do not scrub or scratch the glass surface.
 - Even a soft cloth or applicator, if dry, could cause flaws to scratch the glass.

10.2 Electrostatic Damage

As compared with general MOS-LSI, CCD has lower ESD.

Therefore, take the following antistatic measures when handling the CCD:

- 1) Always discharge static electricity by grounding the human body and the instrument to be used.
To ground the human body, provide resistance of about 1 M Ω between the human body and the ground to be on the safe side.
- 2) When directly handling the device with the fingers, hold the part without leads and do not touch any lead.
- 3) To avoid generating static electricity,
 - a. do not scrub the glass surface with cloth or plastic
 - b. do not attach any tape or labels
 - c. do not clean the glass surface with dust-cleaning tape
- 4) When storing or transporting the device, put it in a container of conductive material.

10.3 Dust and Contamination

Dust or contamination on the glass surface could deteriorate the output characteristics or cause a scar. In order to minimize dust or contamination on the glass surface, take the following precautions:

- 1) Handle the CCD in a clean environment such as a cleaned booth. (The cleanliness level should be, if possible, class 1,000 at least.)
 - 2) Do not touch the glass surface with the fingers. If dust or contamination gets on the glass surface, the following cleaning method is recommended:
 - Dust from static electricity should be blown off with an ionized air blower.
For anti-electrostatic measures, however, ground all the leads on the device before blowing off the dust.
 - The contamination on the glass surface should be wiped off with a clean applicator soaked in Isopropyl alcohol. Wipe slowly and gently in one direction only.
 - Frequently replace the applicator and do not use the same applicator to clean more than one device.
- ※ Note: In most cases, dust and contamination are unavoidable, even before the device is first used. It is, therefore, recommend that the above procedures should be taken to wipe out dust and contamination before using the device.

10.4 Other

- 1) Soldering should be manually performed within 5 seconds at 350°C maximum at the tip of soldering iron.
- 2) Avoid using or storing the CCD at high temperature or high humidity as it is a precise optical component. Do not give a mechanical shock to the CCD.
- 3) CCD has the possibility that white blemish, which originates in the structure of CCD with the passage of time by an external factor such as the radiations, could be generated. Please use white blemish compensation circuit for white blemish generated afterward.

11 PACKAGE OUTLINE AND PACKING SPECIFICATION

11 1. Package Outline Specification

Refer to attached drawing.

(The seal resin stick out from the package shall be passed. And, the seal resins are two kinds of colors, while and transparency.)

11 2. Markings

Marking contents

(1). Product name : R J 3 3 B 4 A A 0 D T

(2). Company name : S H A R P

(3). Country of origin : J A P A N

(4). Date code : Y Y W W X X

Denotes the production ref. code.(2 figures)

Denotes the production day of the week.

1	2	3	4	5	6	7
SUN.	MON.	TUE.	WED.	THU.	FRI.	SAT.

Denotes the production week.

(01,02,03,...,52,53)

Denotes the production year.
(Lower two digits of the year.)

Positions of markings are shown in the package outline drawing.

But, markings shown in that drawing are not provided any measurements of their characters and their positions.

11 3. Packing Specification

3-1. Packing materials

Material Name	Material Spec.	Purpose
Cover Tape	Plastic film(1device/tape)	Glass lid covering
Device case	Cardboard(540devices/case)	Device tray fixing
Device tray	Conductive plastic (90devices/tray)	Device packing(6trays/case)
Cover tray	Conductive plastic(1tray/case)	Device packing
PP band	Polypropylene	Device tray fixing
Buffer	Cardboard(2sheets/case)	Shock absorber of device tray
Plastic film bag	Plastic film	Device tray fixing
Tape	Paper	Sealing plastic film bag and device case
Label	Paper	Indicates part number, quantity and date of manufacture

3-2. External appearance of packing

Refer to attached drawing

11 4. Precaution

1). Before unpacking, confirm the imports of the chapter "Handling Precaution" in this device specification.

2). Unpacking should be done on the stand treated with anti-ESD. At that time, the same anti-ESD treatment should be done to operator's body, too.

ISSUE NUMBER

54226ADC

11 5. Chemical substance information in the product

Product Information Notification based on Chinese law, Management Methods for Controlling Pollution by Electronic Information Products.

Names and Contents of the Hazardous Substances.

Hazardous Substances					
Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)
○	○	○	○	○	○


This table is prepared in accordance with the provisions of SJ/T 11364.

○ : Indicates that said hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement of GB/T 26572.

× : Indicates that said hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement of GB/T 26572.


ISSUE NUMBER

54226ADC

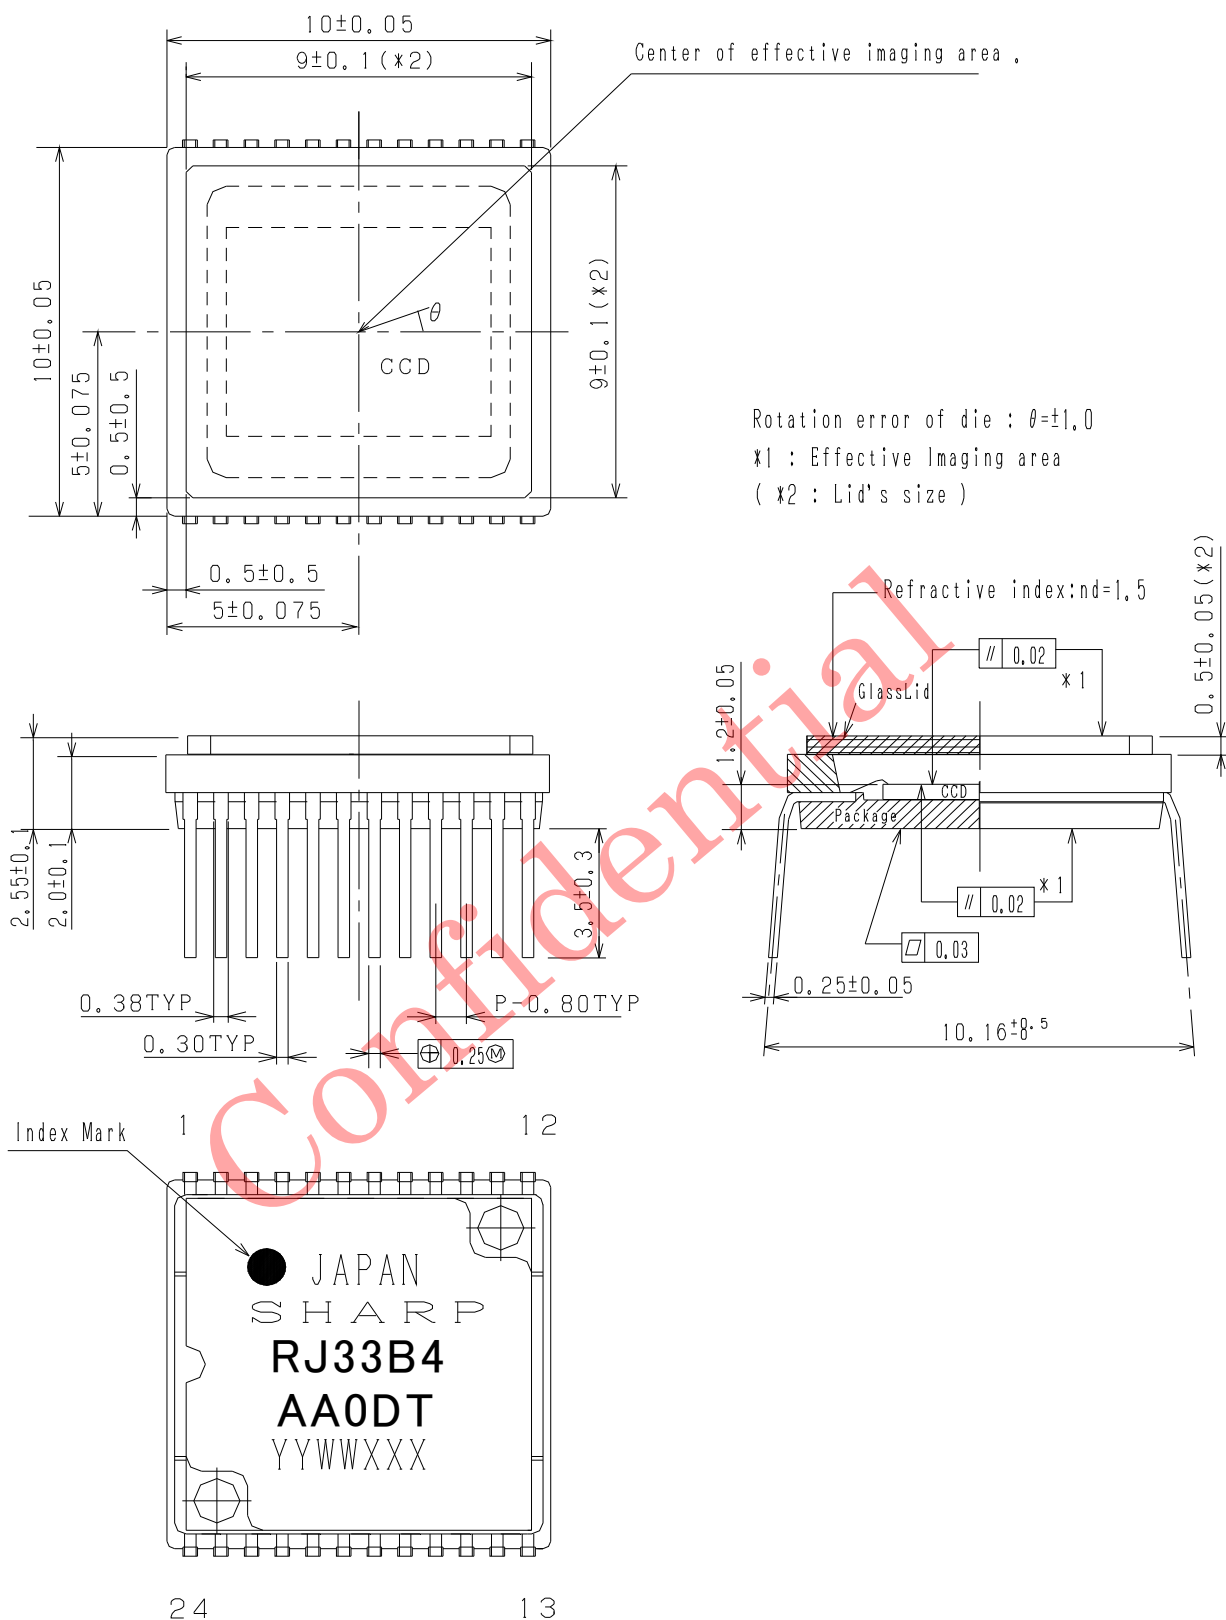

(UNIT : mm)

材質 MATERIAL	仕上 FINISH	名称 NAME	WDIP24-P-400											
			Package Outline Specification											
Assembly Process Production Engineering Dept. I		コード CODE												
ELECTRONIC COMPONENTS AND DEVICES GROUP		図番 DRAWING No.	GDP024A-13E1A											
SHARP CORPORATION														

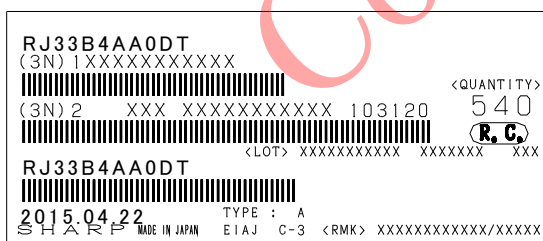

(UNIT : mm)

材質 MATERIAL	仕上 FINISH	名称 NAME	External Appearance of Packing																	
		コード CODE																		
Assembly Process Production Engineering Dept. I																				
ELECTRONIC COMPONENTS AND DEVICES GROUP		図番 DRAWING No.	K S E C - 5 4 0 T 4 - 9																	
SHARP CORPORATION																				